


Estimated Useable Lifetime for the High Plains Aquifer

Based on KGS Section Level Data for saturated thickness (2014-2016) and revised minimum saturated thickness required to support 400 gpm under a 90-day pumping scenario with wells on 1/4 section, USGS average specific yield, USGS 1947 to 2007 average recharge, and DWR section-level groundwater use data 2010-2014 for an average 2-mile radius

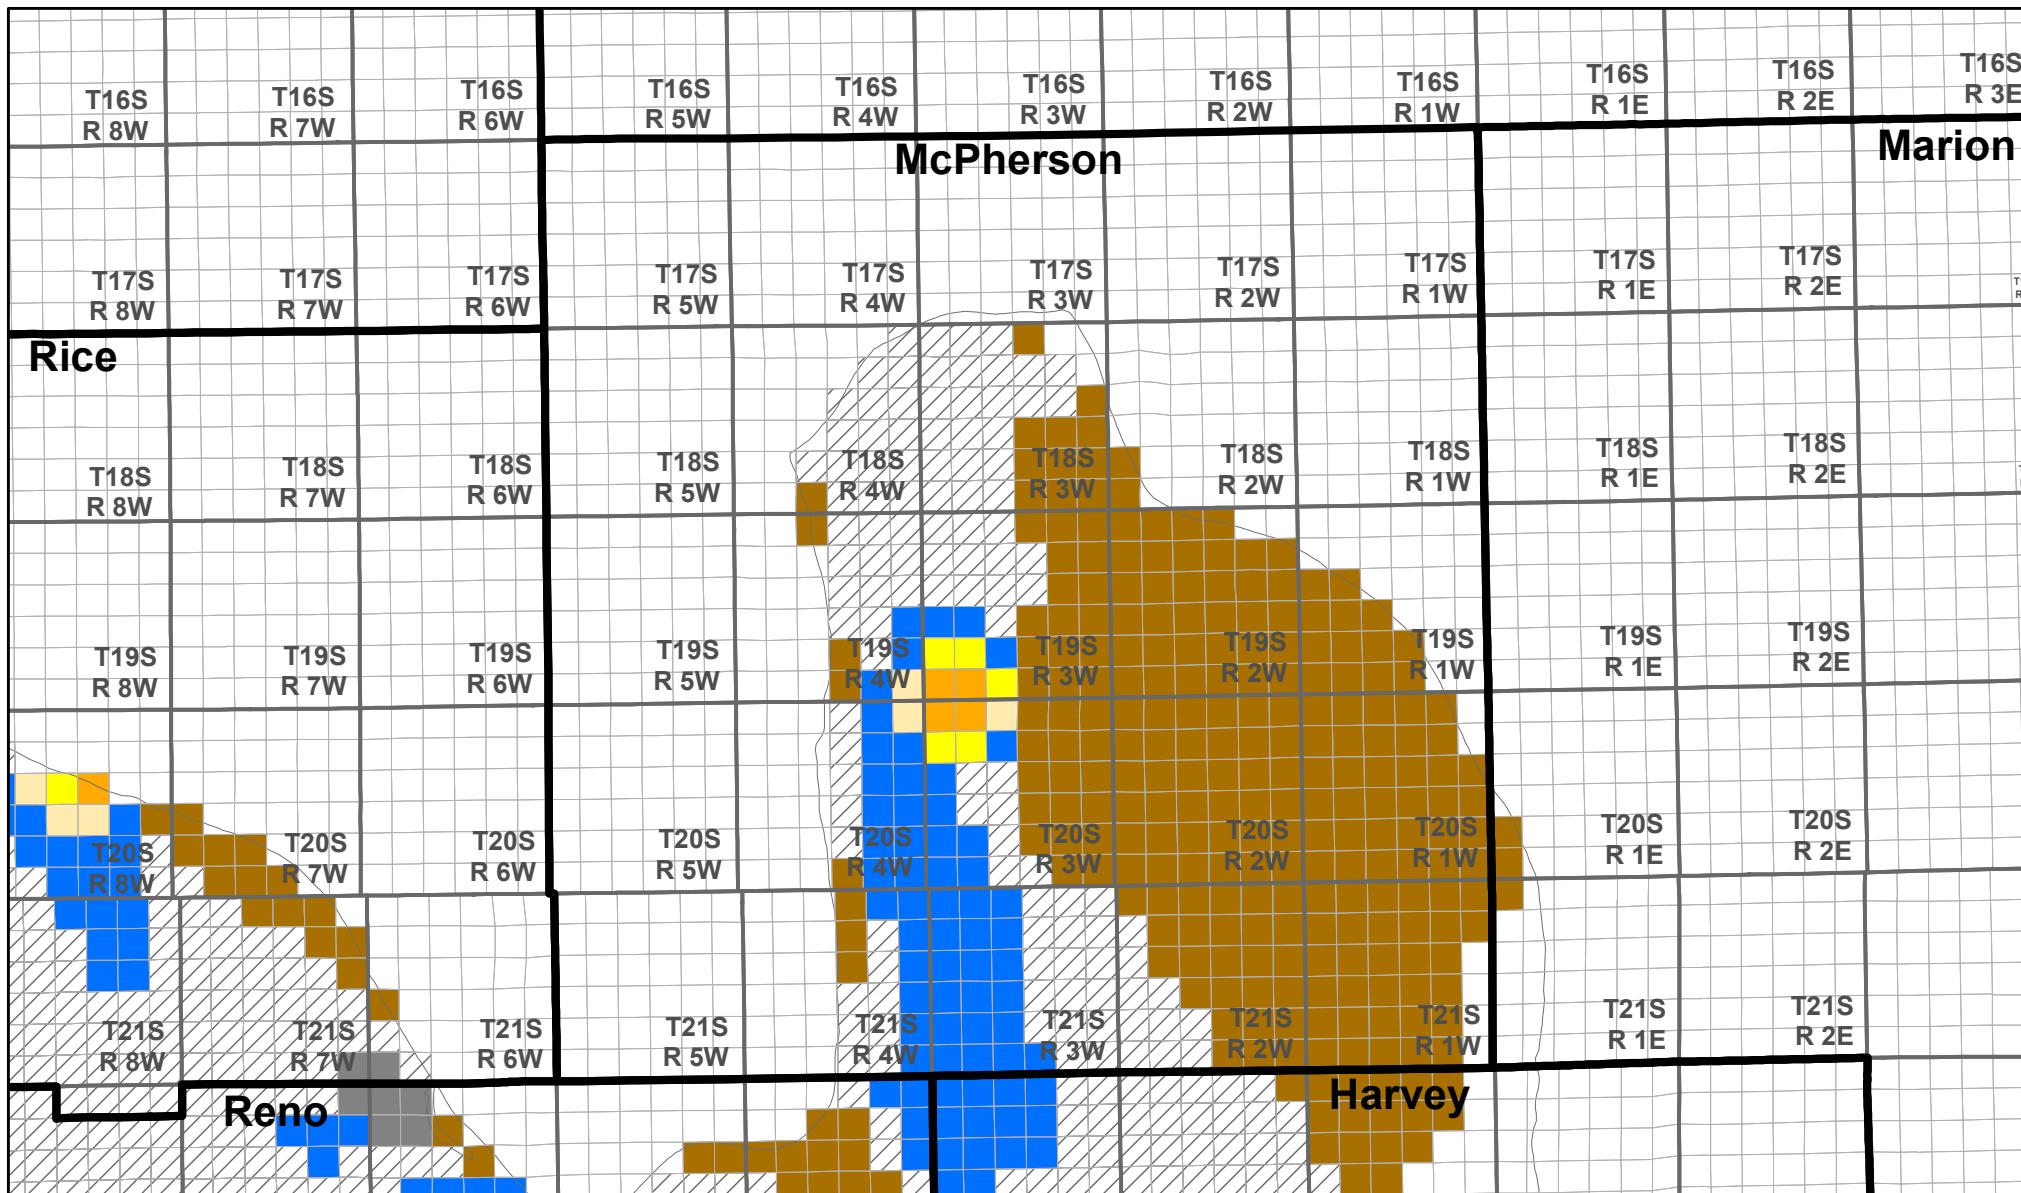


Estimated Years Remaining

- | | |
|--------------|----------------------|
| Less than 25 | 101 to 250 |
| 26 to 50 | More than 250 |
| 51 to 100 | Recharge Exceeds Use |


Low Use Areas

SY Data Unavailable

ST Below Minimum Threshold


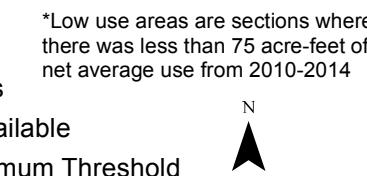


*Low use areas are sections where there was less than 75 acre-feet of net average use from 2010-2014

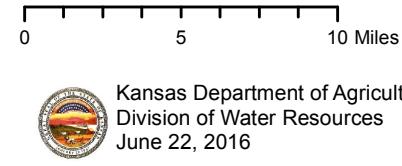

Estimated Useable Lifetime for the High Plains Aquifer



Based on KGS Section Level Data for saturated thickness (2014-2016) and revised minimum saturated thickness required to support 300 gpm under a 90-day pumping scenario with wells on 1/4 section, USGS average specific yield, USGS 1947 to 2007 average recharge, and DWR section-level groundwater use data 2010-2014 for an average 2-mile radius

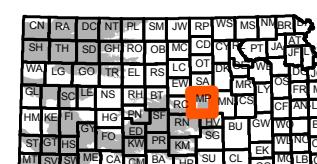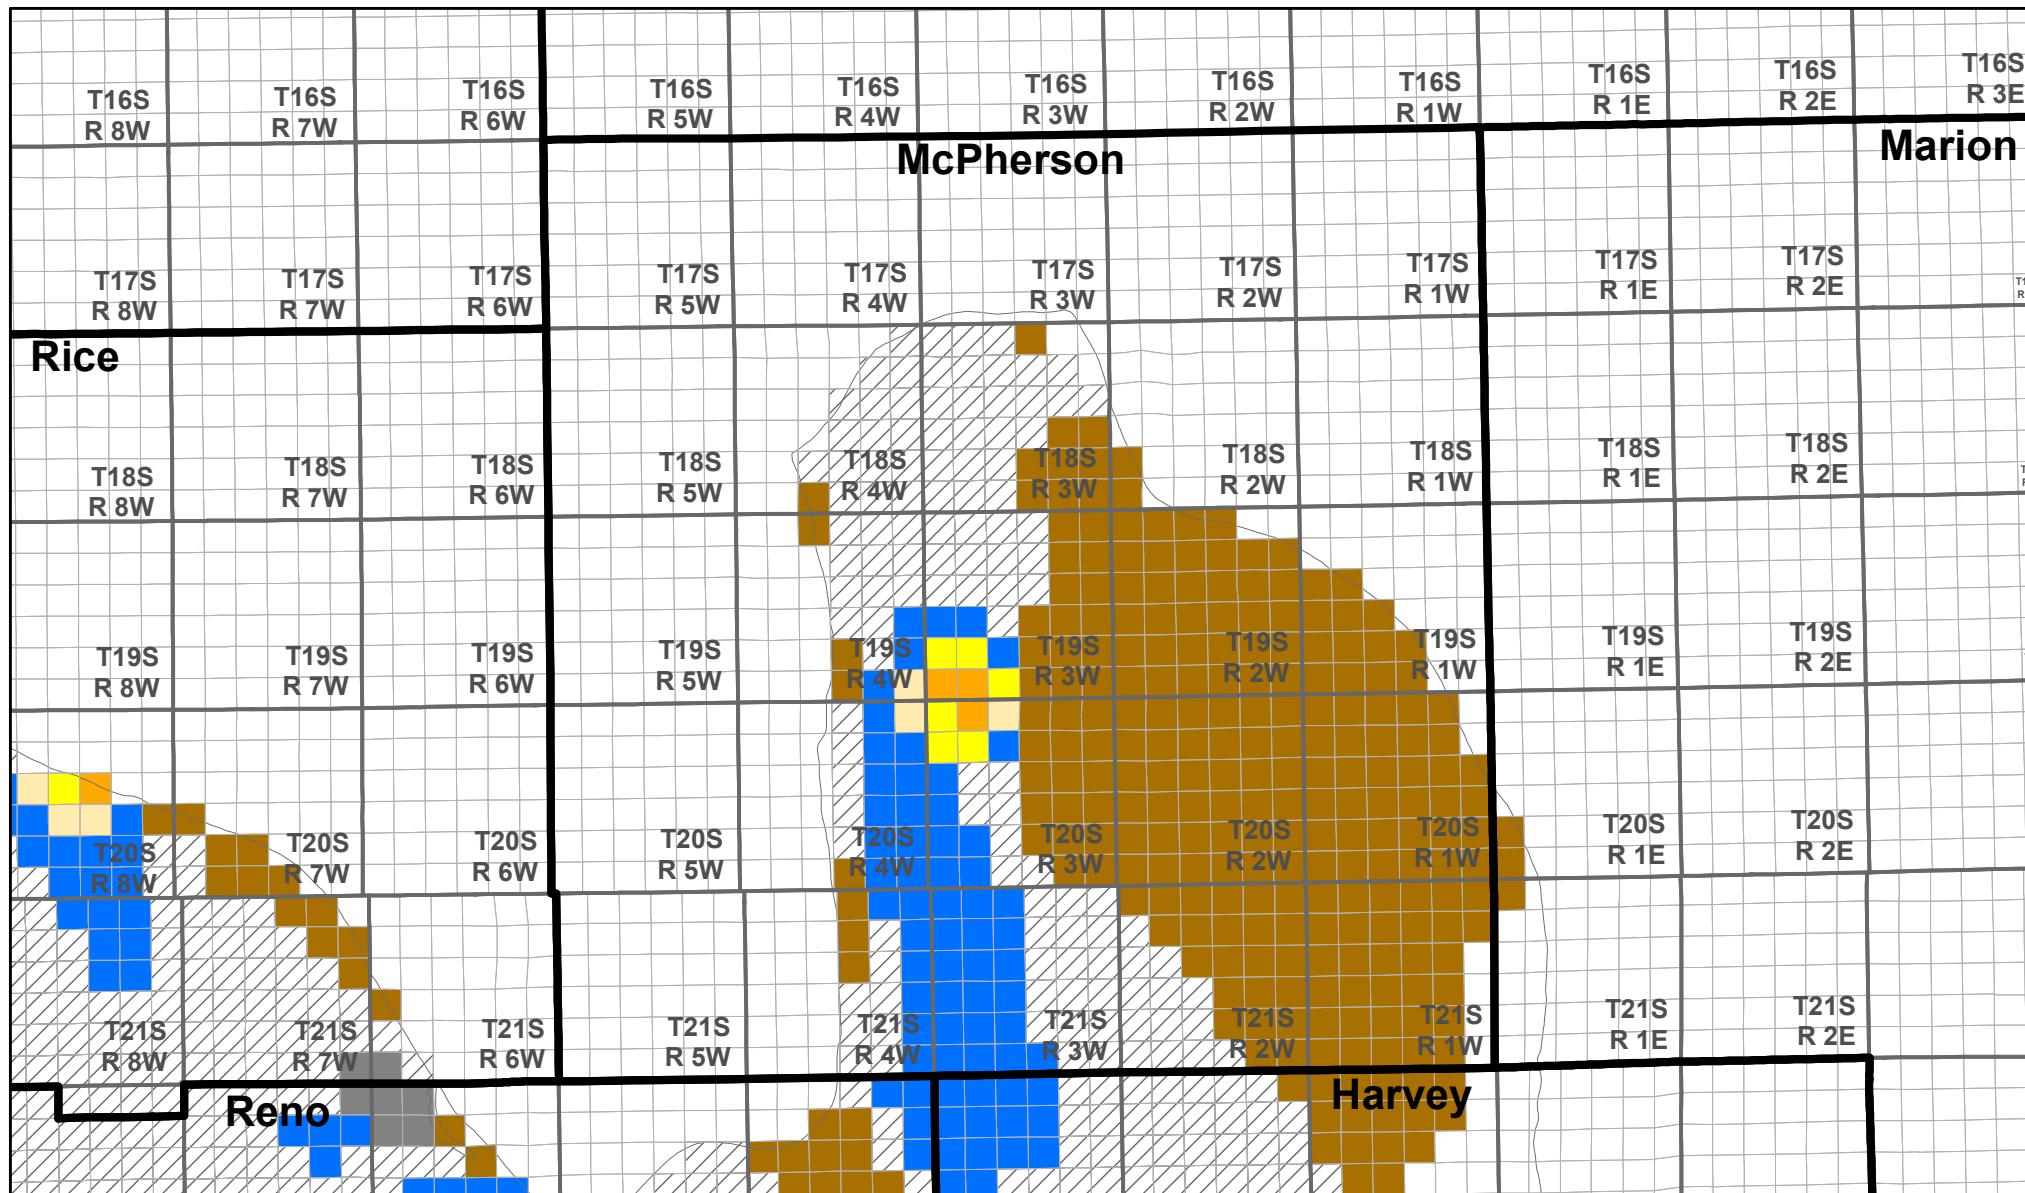

Kansas Department of Agriculture
Division of Water Resources
June 22, 2016

Estimated Useable Lifetime for the High Plains Aquifer

Based on KGS Section Level Data for saturated thickness (2014-2016) and revised minimum saturated thickness required to support 200 gpm under a 90-day pumping scenario with wells on 1/4 section, USGS average specific yield, USGS 1947 to 2007 average recharge, and DWR section-level groundwater use data 2010-2014 for an average 2-mile radius

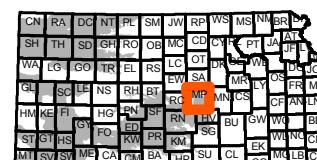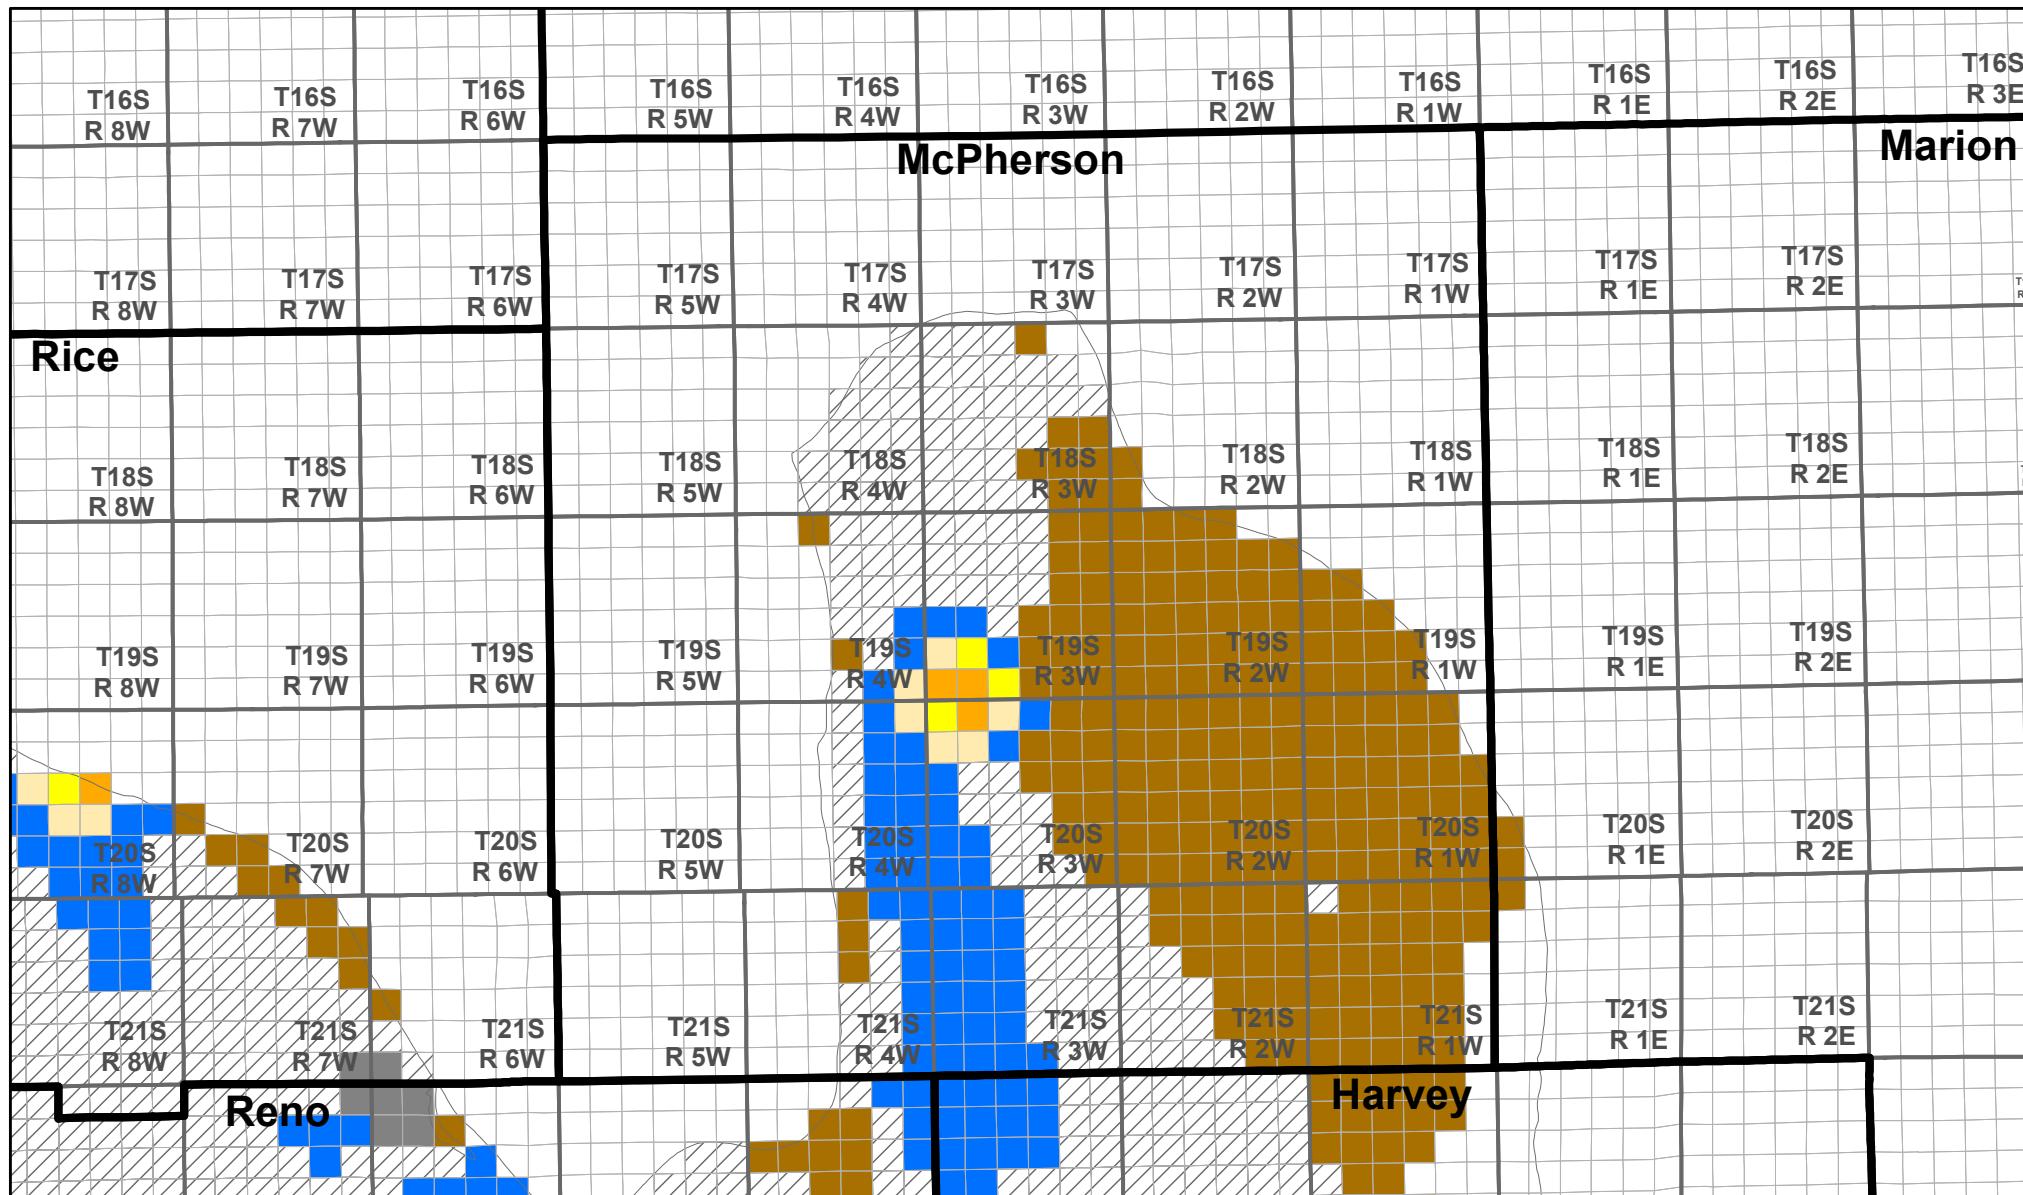

0 5 10 Miles



Kansas Department of Agriculture
Division of Water Resources
June 22, 2016